


lovenhcare™

BP 9851

Phantom Stroller

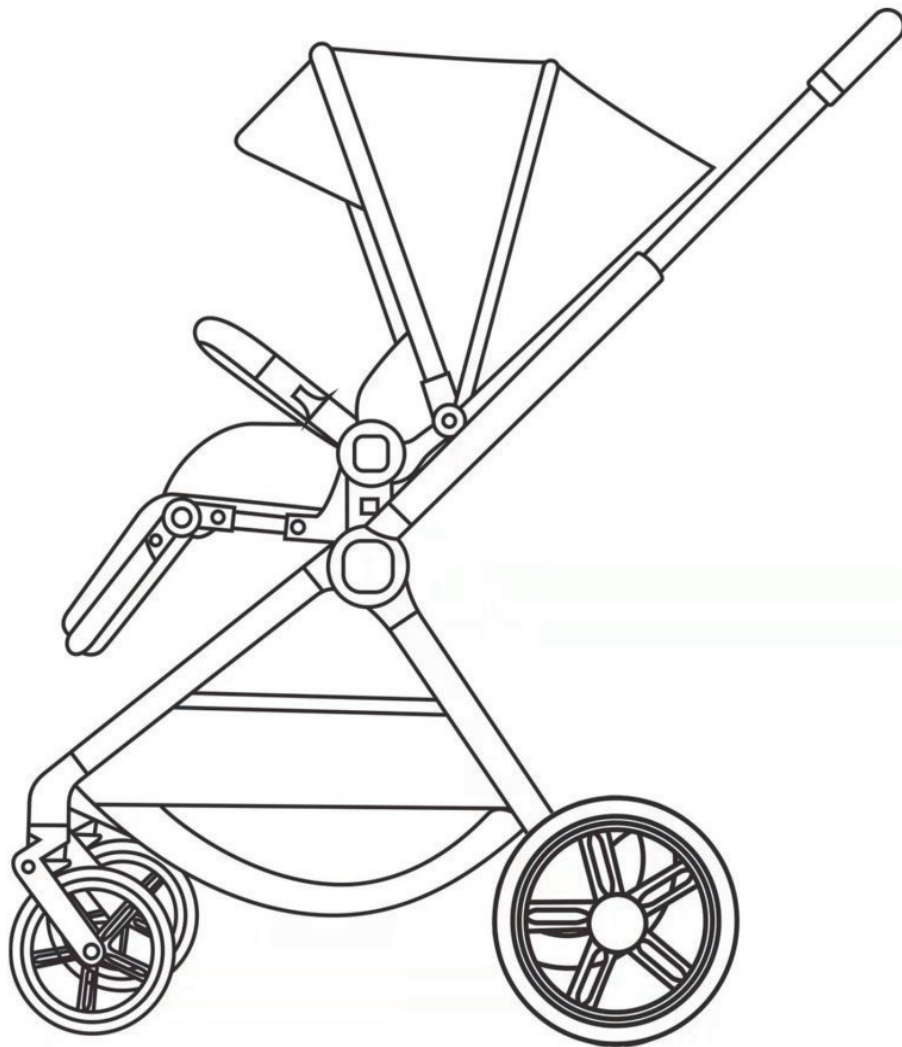


**IMPORTANT - READ CAREFULLY
AND KEEP FOR FUTURE REFERENCE**



Congratulations on purchasing your new Phantom Stroller.

In almost no time you should be able to have this one of kind stroller ready to meet your beautiful child :)

Please take a few moments to read this instruction manual on how to assemble and use your stroller correctly so you can rest assured that your little one is Safe N Secure.

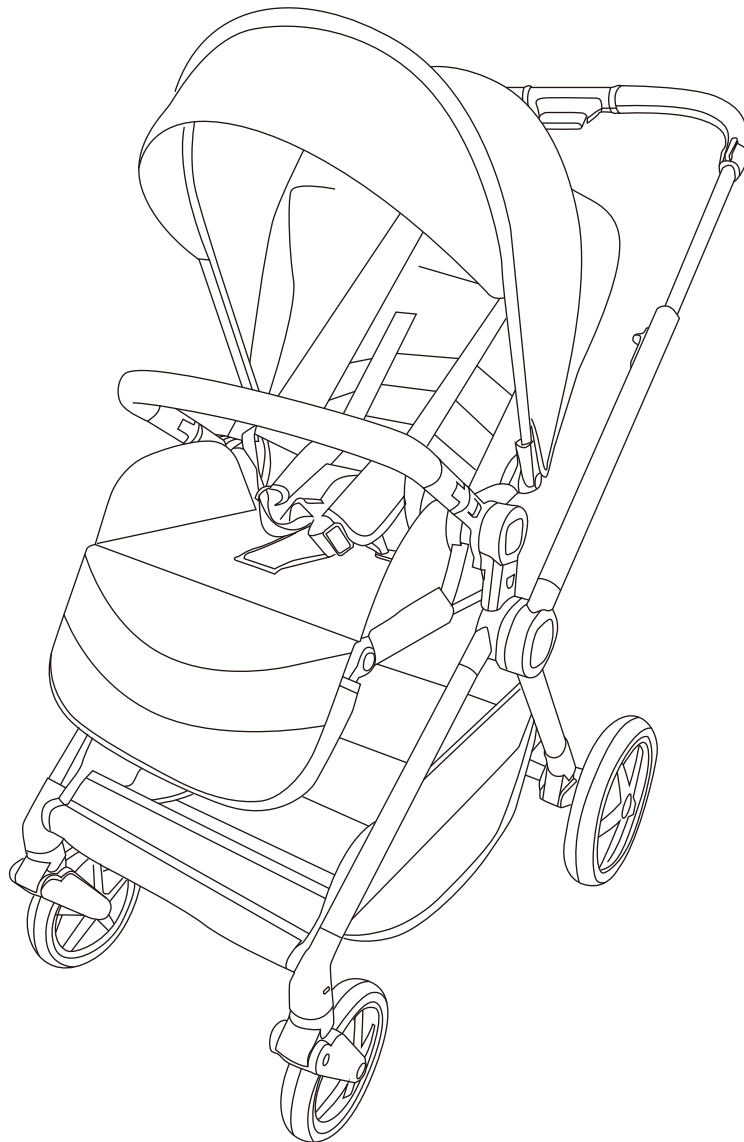

**ALWAYS FOLLOW THE MANUFACTURES INSTRUCTIONS.
READ ALL INSTRUCTIONS CAREFULLY BEFORE ASSEMBLY AND
USE OF THIS STROLLER. THE CORRECT USE AND MAINTENANCE OF THIS PRODUCT IS ESSENTIAL.**



WARNINGS: TO AVOID INJURY OR DEATH:

ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.

- WARNING: USE THIS HARNESS AT ALL TIMES.
- WARNING: WHEN NOT IN USE DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAP AND/OR BUCKLE.
- WARNING: DO NOT USE THIS SEAT WITH ANY OTHER MODELS OF STROLLER.
- WARNING: TO AVOID INJURY OR DEATH: ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.
- DO NOT LEAVE CHILDREN UNATTENDED.
- SECURE THE CHILD IN THE HARNESS AT ALL TIMES.
- DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS STROLLER.
- MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE STROLLER.
- The harness can form loops which may be a strangulation hazard and to never leave a harness connected when not fitted to a child in the stroller.
- The stroller not be used near an open fire or exposed flame.
- Care should be taken if the stroller is used on stairs or escalators.
- Brakes must always be applied when the pram/stroller is not moving.
- IT IS RECOMMENDED TO REMOVE THE CHILD FROM THE STROLLER BEFORE GOING UP OR DOWN STAIRS OR ESCALATORS.
- DO NOT LIFT THE STROLLER BY THE ARM BAR (SUPPLIED) BECAUSE IT MAY DISENGAGE.
- This chassis is compatible with carry cot and/or seat unit of stroller This chassis is also compatible with car seat Maxi Casi Cabrio-Fix or Maxi Casi Pebbles with adapter for Pahntom Stroller.
- The use of this stroller is recommended for children from 0 months till 4 years. The most reclined position is designed for new born babies. Configuration with stroller seat is from 0 months to 22 kg.
- Configuration with carrycot is from birth to 9 kg. Configuration with optional car seat is from birth to 13 kg.
- FOR CAR SEAT USED IN CONJUNCTION WITH A CHASSIS: this vehicle does not replace a cot or a bed. Should your child need to sleep, then it should be placed in a suitable pram body, cot or bed.
- Do not overload the basket with more than 2 kg.
- The maximum permissible loading of the rear pocket on the canopy does not exceed 0.5 kg.
- Any load attached to the handle and/or on the back of the backrest and/or on the sides of the stroller affects the stability of the stroller. The stroller may become unstable and tip over and can injure the child.
- This product is not suitable for running or skating.
- The product must be assembled by an adult.
- Always use the restraint system.
- To avoid serious injury from falling or sliding out always use the 5 point safety harness.
- Always use the crotch strap in combination with the waist belt.
- Pay special attention when manoeuvring the stroller up or down the pavement, it is best to do it backwards.
- Be aware of the risk of open fire and other sources of strong heat, such as electric bar fires, gas fires, etc. in the near vicinity of the stroller.
- Avoid hot liquids, power cables and other possible dangers may come with- in range of a child.
- Do not use this stroller if any parts are broken, torn or missing.
- Ensure that all the locking devices are engaged before use.
- Before making adjustments to stroller ensure that child's body is clear of any moving parts.
- To avoid injury ensure that the child is kept away when unfolding and folding this product.
- Do not use on stairs, steep slopes, steps, escalators or muddy/ rough terrain, fold stroller and carry.
- Do not overload as stroller may become unstable.
- Do not lift and carry the stroller while open with a child in it.
- Do not carry additional children, bags, goods or accessories in stroller except as recommended in the manufacturer's instructions.
- This vehicle has been designed for maximum of 1 child per seat, per carry cot or per car seat.
- Do not use this stroller if any screws, nuts, bolts, etc. are missing or any component is damaged or missing.
- Put on all the brakes whenever you park the stroller.
- Always apply the brakes when ever the stroller is stationary.
- Do not let the child play with this product.

IMPORTANT - READ CAREFULLY AND KEEP FOR FUTURE REFERENCE.

Your child's safety may be affected if you do not follow these instructions.

Use only spare parts delivered by supplier for replacement. Damages caused by overloading or wrong folding are not covered by warranty.

Prolonged exposure to sunshine may cause changes in the colour of materials and fabrics.

Do not expose this product to extreme temperatures. Extreme sunshine or temperatures may cause colour changes or bent parts.

- Do not allow child to stand on seat or footrest.
- The parking device shall be engaged during the loading and unloading of children.
- Do not allow objects on top of canopy as this stroller may become unstable.
- Keep plastic rain cover away from children to avoid suffocation. Do not use the rain cover if the stroller is not fitted with the hood or sun canopy to prevent the risk of suffocation. To prevent the risk of suffocation, never leave the stroller with child in it under the sun, with the rain cover fitted to it.
- Do not use accessories or replacement parts other than the ones recommended by the instruction manual.
- Do not use accessories which are not approved by the manufacturer.
- Only replacement parts supplied or recommended by the manufacturer/distributor shall be used.
- To avoid injury ensure that the child is kept away when unfolding and folding this product.
- Please ensure that you complete regular routine inspections, maintenance and cleaning of this stroller.
- Take regular care of all metal parts on the stroller to ensure it looks good. The ends of the axle should be cleaned and oiled every 4 weeks.
- Keep this product away from children when not in use.
- Never put stroller near steps or stairs.

Warranty Against Defects

All Love N Care products are guaranteed for twelve months from the date of purchase. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law.

You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage.

You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. This covers against faults which develop through faulty materials and workmanship.

Misuse, accidental damages, normal wear and tear or neglect are not covered. If a fault becomes apparent, please return the item to the store of purchase with your receipt. You must inform the store what the defect is. We will then arrange for its repair or it will be assessed for replacement as expediently as possible. The benefits of this warranty are in addition to other right and remedies under the law in relation to the goods or services to which this warranty relates. If you are unable to return the item to the store of purchase, you can contact Love N Care on free call 1300 732 599.

Where you send the product directly to the manufacturer then you may be liable for the costs of transportation to and from Love N Care. Love N Care will meet the reasonable expenses incurred by a consumer in making a warranty claim. You can claim expenses incurred in making a claim by contacting our customer service team on 1300 732 599 or by email at info@lovenecare.com.au

PARTS LIST

Check if following spare parts are in the box:

- Chassis
- Rear wheels
- Front wheels
- Seat including upholstery and canopy
- Front bumper

Note that the fabric patterns, colour pictures and stroller accessories on this product in this instruction manual may vary from that of the product that you have purchased.

If one or more of the above mentioned spare parts are missing or broken, please contact the store where you bought the product, before using.

CARE AND MAINTENANCE

Before starting operation, please applies some lubricant silicone free oil Vaseline onto the hinges and joints to ensure smooth function.

To prolong the life of your nursery product, keep it clean and do not leave in the direct sunlight for extended periods of time.

Check the wheels regularly for wear and make sure that there is no dust and sand between the axles and wheels.

Removable fabric covers and trims may be cleaned using warm water with a household soap or a mild detergent. Allow it to dry fully in the air, preferably away from direct sunlight.

Do not allow the stroller to come in contact with salt water, this causes the formation of rust.

Check your stroller regularly. If any parts like bolts, screws, fabric pieces or stitching, are found to be loose, broken or damaged, always repair or replace them.

Where damage or dysfunction occurs, stop using the stroller and contact your dealer.

Check and oil caster bolts and wheel axles periodically and replace any damaged parts immediately.

Helpful hints

If the wheels squeak, use a silicon based spray ensuring it penetrates the wheel and axles assembly.

Do not dry clean or use bleach.

Do not machine wash, tumble or spin dry, unless the care labelling on the product permits these methods.

Non removable fabric covers and trims may be cleaned using a damp sponge with soap or mild detergent. Allow it to dry completely before folding or storing it away. In some climates the covers and trims may be affected by mould and mildew. To help prevent this occurring, do not fold or store the product if it is damp or wet. Always store the product in a well ventilated area.

Always check parts regularly for tightness of screws, nuts and other fasteners, tight en if required. To maintain the safety of your nursery product, seek prompt repairs for bent, torn, worn or broken parts.

Use only parts and accessories approved by the supplier.



ASSEMBLY

Please keep all packaging material away from babies and children, to prevent suffocation

1. UNFOLD THE STROLLER

Open the package and take out the parts. Lift up the handle bar and fling open the stroller as pict. 1 and 2. When you hear a CLICK the frame is unfolded completely and verify frame is fully locked in place



1.



2.



3.

2. ASSEMBLY/ DISASSEMBLY FRONT WHEEL

Pict. 4: Plug the wheel bearing into the wheel housing until you hear a click, it indicates that the wheel is installed in place. Please try to move and rotate all the wheels by your hand to make sure all the wheels are firmly fixed on wheel houses before use.

Pict. 5: The front wheel can swivel all the way.

Push the small lock up {off) and down {on) to swivel or not.

Pict. 6: The wheels can be removed quickly by pressing the arrow button shown on picture 6 and pulling out the wheel at the same time.



4.



5.




6.

ASSEMBLY


3. ASSEMBLY/ DISASSEMBLY REAR WHEEL

Pict. 7: Plug the wheel bearing into the wheel housing until you hear a click, it indicates that the wheel is installed in place. Please try to move and rotate all the wheels by your hand to make sure all the wheels are firmly fixed on wheel houses before use.

Pict. 8: The wheels can be removed quickly by pressing the arrow button shown on picture 8 and pulling out the wheel at the same time.

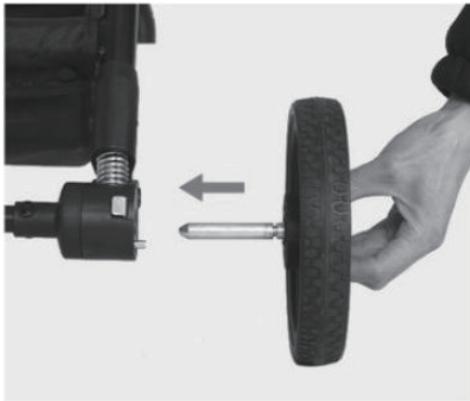

7.

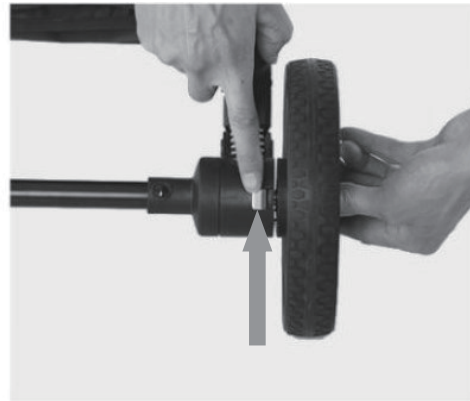

8.

Front and rear wheels are equipped with shock absorbers.

4. OPEN THE SEAT

Pict. 9: Open the seat along the direction of the arrow until you hear "CLICK" and verify that the seat is fully locked in place as picture 10.

Pict. 10: Open the front armrest along the direction of the arrow until you hear a click and verify that the armrest is fully locked in place as picture 11.



9.



10.



11.

ASSEMBLY

5. **INSTALL/ REMOVE SEAT (FORWARD & REVERSE)**

Pict. 12: Forward installing seat: clamp the seat to the frame in the direction indicated by the arrow and verify that seat is fully complete locked in place, see pict. 13.

Pict. 14: Reverse install seat: Press the seat release button (1) and lift the seat up (2) Pict. 15: Reverse the seat, and then attach it to the frame.

A "click" sound means the seat is attached completely.



13.



14.



15.



16.

6. **INSTALL/REMOVE/OPEN THE BUMPER BAR**

Picture 16: Insert into the both side plastic hole of the front armrest holder until you hear "CLICK" and verify that armrest is fully completely locked in place.

Picture 17: Press front armrest lock buttons and pull out the armrest outward with hand, remove the armrest completely.

Picture 18: Press front armrest lock button and pull out one side of the armrest out ward with hand, and then open the front armrest



16.



17.



18.


ASSEMBLY

WARNING:

Always secure the child with the seat belt. The front bumper is not a restraint device.
DO NOT lift the stroller by the bumper. Use care when attaching the bumper on the stroller with a child in the stroller.

7. ADJUSTING THE HANDLE

Picture 19: The height of the handle can be adjusted by pinching the handle inward (as picture 20).

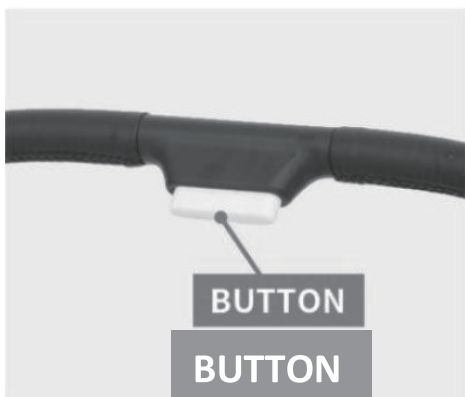

19.



20.

8. ADJUSTING BACKREST

Pict. 21/22: Pull the adjusting button on the backrest, you can lift upward or down ward to adjust the backrest position. The backrest can be adjusted in 3 positions.



21.



22.

9. CANOPY ADJUSTMENT

Pict. 23: The canopy can be adjusted along with the arrow direction



23.

ASSEMBLY

10. ADJUSTING LEGREST

Picture 24: Press the button on both sides to adjust the height of the leg rest.



24.

HOW TO USE


11. USING 5-POINT SAFETYBELT

WARNING: ALWAYS USE THE CROTCH STRAP WITH SAFETY BELTS.

Slide the shoulder belt on to the upper sides of the hip safety belts.

Then lock buckle parts of hip belts together into the cross belt (belt between the legs) until secure click is heard.


Adjust shoulder, hip and crotch belt with adjustment buckles in right length to fit your child. To release belt just press the socket button.

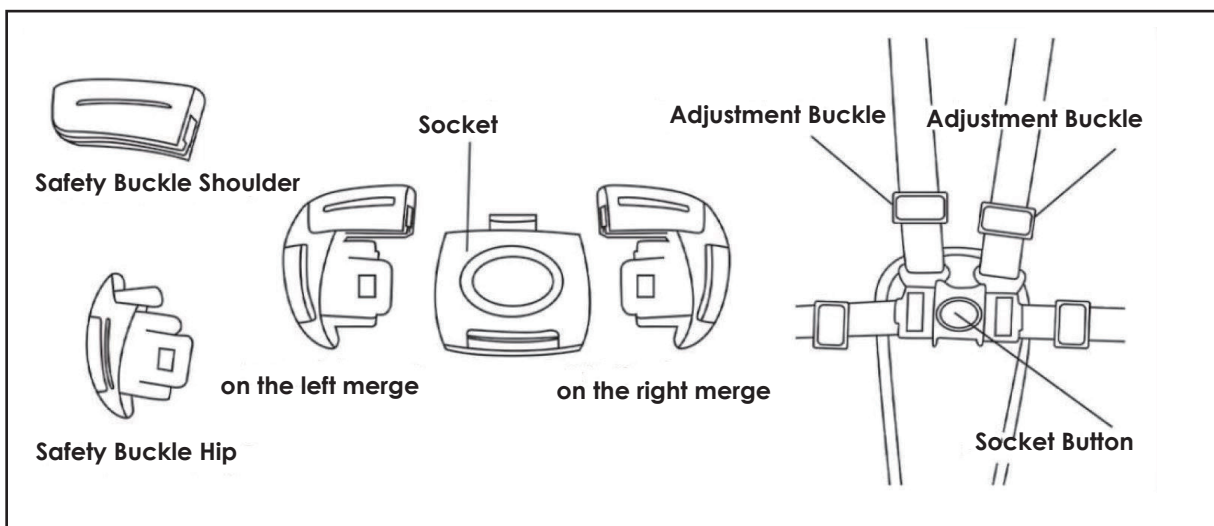

HOW TO USE

12. BRAKE FUNCTION

Pict. 26: To engage the brake, push down the brake bar (lock). To release, lift the brake bar (unlock).

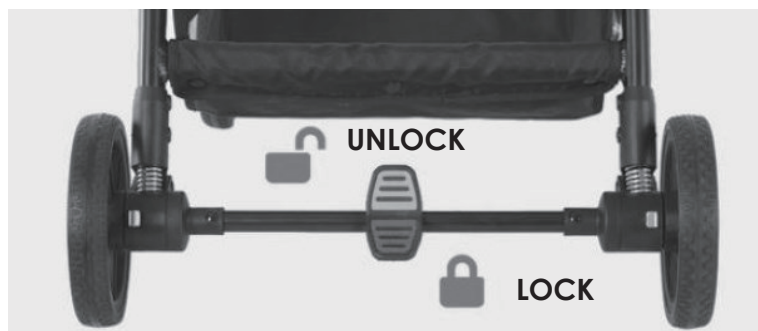

26.



WARNINGS:
**ALWAYS APPLY THE BRAKES WHEN
THE STROLLER IS STATIONARY.**

WARNING: The parking device shall be engaged when placing and removing the child.

13. SEAT FORWARD FOLDING OPERATION

Pict.27: Pull the backrest adjusting handle to turn the back of the seat forward (see picture 28).

Pict. 29: After adjusting the height of the handle bar to the lowest position, press the second lock on the right hand and pull up the handlebars both side of the handle until the handlebar is folded downwards as picture 30.

Picture 31: Pull up the hand is completion of the forward folding stroller (pict. 32,33).



27.



28.



29.



30.



31.



32.



33.

HOW TO USE

14. SEAT REVERSE FOLDING OPERATION


The folding operation is same as seat forward folding operation. After folding it is as picture 34.



34.

15. SEAT FORWARD/ SEAT REVERSE OPENING THE FRAME

First refer to STEP 1 to open the frame and pull the handlebars up until you hear "CLICK", then open the seat and verify that seat and frame are locked in place by following STEP 4. Seat opens in reverse, same as seat opens forward. (pict. 35)

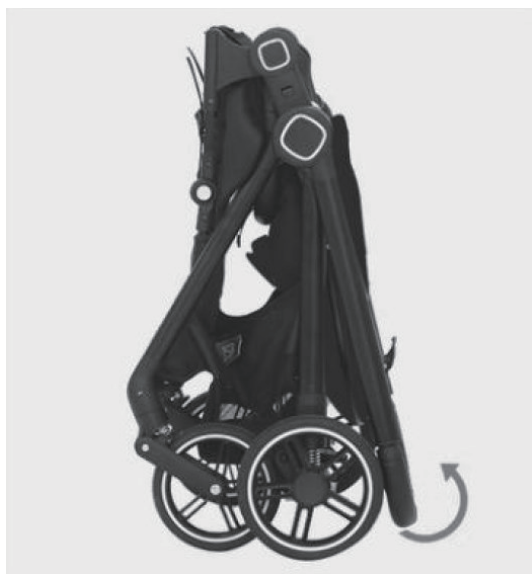

35.

HOW TO USE

16. RAIN COVER ASSEMBLY

Put rain cover on the stroller and make sure it has been fixed by Velcro.



WARNING:

Be extremely careful when using the rain cover. Store away from children when not in use. To be used under adult's supervision. Do not use the rain cover if the stroller is not fitted with the hood or sun canopy to prevent the risk of suffocation. To prevent the risk of suffocation, never leave the stroller with child in it under the sun, with the rain cover fitted to it. To prevent your child from overheating, always remove the rain cover when indoor or in warm environments.

17. FOOTMUFF AND DIPPER BAG ASSEMBLY (Not Included, Sold Separately)

To assemble the footmuff, place it over the stroller

To assemble the diaper bag, place it over the stroller



HOW TO USE

18. CAR SEAT ADAPTOR (Not Included, Sold Separately)



WARNINGS:

- IT IS UNSAFE TO USE ACCESSORIES NOT APPROVED FOR USE WITH THIS STROLLER.
- REMOVE THE STROLLER SEAT OR BASSINET FROM THE STROLLER FRAME BEFORE INSTALLING THE BABY CAPSULE.
- THE BABY CAPSULE MUST BE CORRECTLY FITTED AND LOCKED INTO THE FRAME.
- SECURE THE CHILD USING THE BABY CAPSULE HARNESS AT ALL TIMES.
- DO NOT LEAVE THE CHILD IN THE BABY CAPSULE FOR EXTENDED PERIODS.
- THE BABY CAPSULE MUST BE REMOVED FROM THE STROLLER FRAME BEFORE FOLDING.
- THE MAXIMUM WEIGHT OF THE CHILD USING THE MAXI COSI MICO/ JOIE-I GEMM/ NUNA CAPSULES IS NOT TO EXCEED 12KG.
- THE BABY CAPSULE CAN BE PLACED EITHER IN THE FORWARD OR REARWARD FACING POSITIONS.
- THE STROLLER'S CAR SEAT ADAPTORS MUST BE ATTACHED TO THE STROLLER FRAME BEFORE ATTACHING THE COMPATIBLE CAPSULE

INSTALLING AND REMOVING THE ADAPTORS ON THE FRAME.



Place the adaptors into the designated positions on each side of the frame. Repeat for both sides. The adaptors should click into place.



To **remove** the adaptors press in and hold the button on the sides and then pull up the adaptors out off the frame

HOW TO USE

ATTACHING THE CAPSULE

PLEASE NOTE: THESE INSTRUCTIONS ARE FOR INSTALLING AND REMOVING THE BABY CAPSULE ON THE STROLLER ONLY. FOR INSTALLING AND PROPER USE OF THE BABY CAPSULE IN THE CAR, PLEASE FOLLOW THE INSTRUCTIONS MANUAL PROVIDED WITH THE BABY CAPSULE.
ENSURE THE BABY IS SECURED IN THE BABY CAPSULE WITH THE HARNESS AT ALL TIMES. REFER TO THE BABY CAPSULE INSTRUCTION MANUAL REGARDING PLACING AND SECURING YOUR BABY IN THE BABY CAPSULE.



Engage the stroller brake. Align the baby capsule with the adaptors. Press firmly down on the adaptors.
Pull up on the baby capsule to ensure they are locked onto the stroller frame.

REMOVING THE CAPSULE

BEFORE REMOVING THE BABY CAPSULE LOCK THE STROLLER BRAKES.
PRESS THE RELEASE BUTTONS ON EACH SIDE OF THE CAPSULE AND LIFT THE HANDLE FOR THE CAPSULE UPWARDS (REFER TO BABY CAPSULE INSTRUCTION MANUAL REGARDING THERE LOCATION).
LIFT AND REMOVE THE BABY CAPSULE FROM THE STROLLER FRAME.



Contact Us

Head Office:

Love N Care Pty Ltd.
297-299 Canterbury Rd, Revesby
NSW 2212 Australia
Contact No: 02 9774 4655
Email: info@lovencare.au
Website: www.lovencare.au

loveⁿcare

Let's be friends!



<http://www.facebook.com/lovencare1>



http://twitter.com/love_ncare



100 % AUSTRALIAN OWNED SINCE 1984