

lovehncare™



TRIXI

INSTRUCTION MANUAL

PLEASE RETAIN FOR FUTURE REFERENCE

BP 9773



Congratulations on your new quality Love N Care product from our exclusive range of baby products. This exceptional design combines the most unique features that any baby product offers.

We are confident that you will appreciate its many highlights, including its reliability and durability. Your new product has been manufactured to comply with the Highest Quality Standards and comes with a 12-month warranty.

As you will soon learn there are many more great features about your new Love N Care product.



Safety guidelines and instructions must always be followed before making use of this product, please retain these instructions for future reference.

This product complies with product standard AS/NZS 2088:2000

WARNING

WARNING: TO AVOID INJURY OR DEATH:

FOLLOW THE MANUFACTURER'S INSTRUCTIONS.

PUT ON ALL THE BRAKES WHENEVER YOU PARK THE STROLLER.

ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.

DO NOT LEAVE CHILDREN UNATTENDED.

SECURE THE CHILD IN THE HARNESS AT ALL TIMES.

DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS STROLLER.

MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE STROLLER, OTHERWISE THEY MAY BE INJURED.

USE THE HARNESS AT ALL TIMES.

WHEN NOT IN USE DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAP AND/OR BUCKLE.

The harness can form loops which may be a strangulation hazard. Never leave a harness connected when not fitted to a child in the stroller.

To avoid serious injury always use the harness provided to secure the child.
(Adjust the straps to suit the body size of your child)

THE MAXIMUM WEIGHT FOR THE STROLLER SEAT IS 15KG.

THE MAXIMUM WEIGHT FOR THE BOTTOM BASKET IS 5KG.

SUITABLE FROM NEWBORN TO 36 MONTHS


It is unsafe to use accessories other than those supplied or approved by Love N Care
Care should be taken if the stroller is to be used on stairs or escalators.

This stroller should not be used near an open fire or an exposed flame.

Care should be taken whilst folding and unfolding stroller to prevent fingers being trapped.

Ensure your child's fingers, hands and all other body parts are clear from any moving part when adjusting the seat or handle on your stroller.

NAME OF PARTS

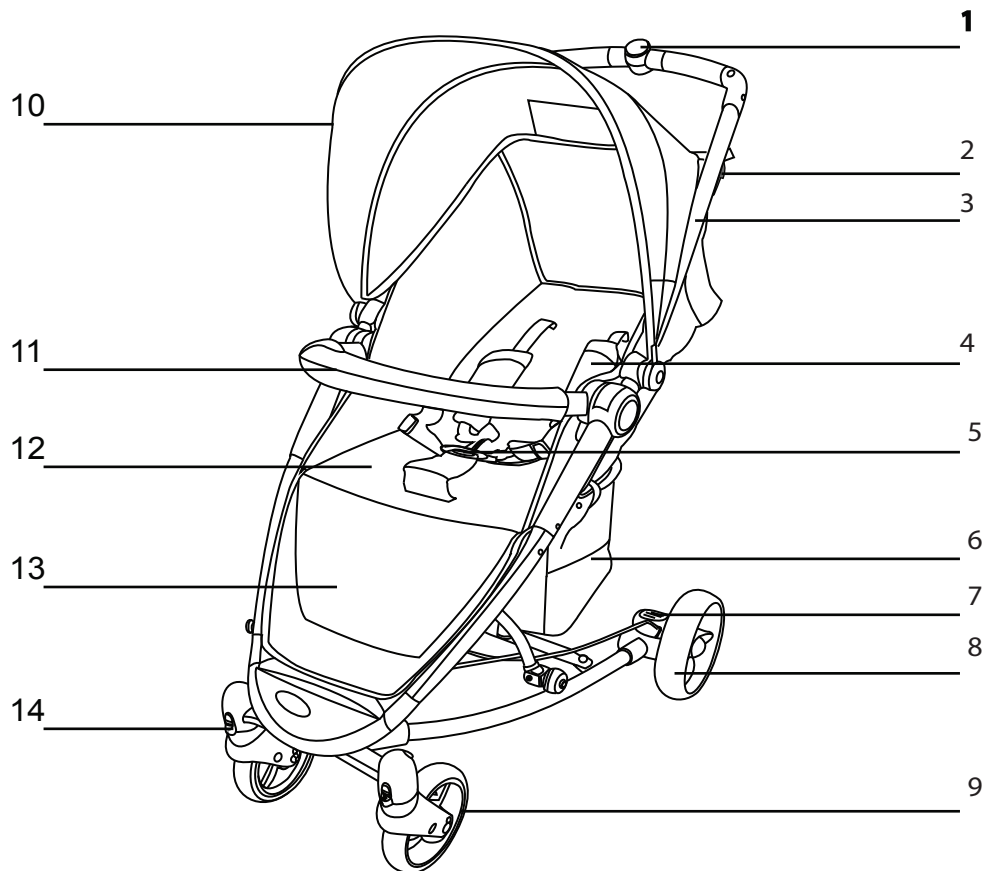

- | | | |
|----------------------|-----------------|----------------|
| 1 Button | 6 Mesh basket | 11 Front bar |
| 2 Folding latch | 7 Parking brake | 12 Seat |
| 3 Handle | 8 Rear wheel | 13 Foot Rest |
| 4 Shoulder protector | 9 Front wheel | 14 Swivel lock |
| 5 Harness buckle | 10 Canopy | |

CARE AND MAINTENANCE

All love n Care products have one year warranty from the date of purchase.

It is recommended to regularly inspect and maintain movement of locking devices, and security of essential components.

To maintain the stroller follow the steps mentioned below:

If wheels become stiff, spray with dry silicon lubricant

The frame can be washed with soap and warm water, do not use bleach.

The seat can be wiped down with a dry cloth using soapy warm water.

The padded stroller liner should be hand washed and hung to dry but not directly under sunlight.

CARE AND MAINTENANCE

All love n Care products have one year warranty from the date of purchase.

It is recommended to regularly inspect and maintain movement of locking devices, and security of essential components.

To maintain the stroller follow the steps mentioned below:


- If wheels become stiff, spray with dry silicon lubricant
- The frame can be washed with soap and warm water, do not use bleach.
- The seat can be wiped down with a dry cloth using soapy warm water.
- The padded stroller liner should be hand washed and hung to dry but not directly under sunlight.

IMPORTED BY:


**LOVE N CARE PTY LTD, 297-299 CANTERBURY RD
REVESBY NSW 2212 AUSTRALIA**

ASSEMBLY INSTRUCTIONS

Unfold and Assemble

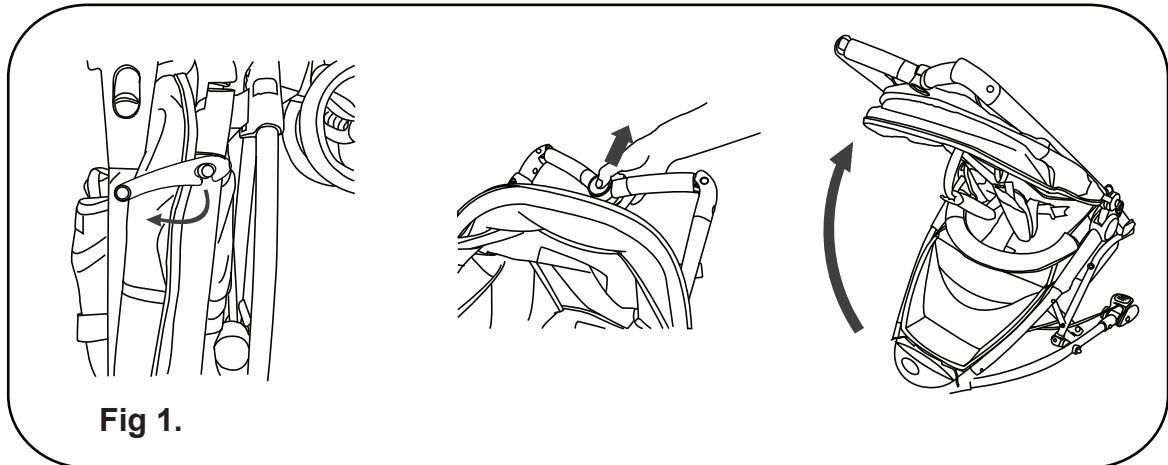

1. Unfold the frame - remove the locking latch. Grasp both handles and lift up quickly to open frame and press down the handles until you hear clicks. Pull up the upper Lock as shown in Fig. 1

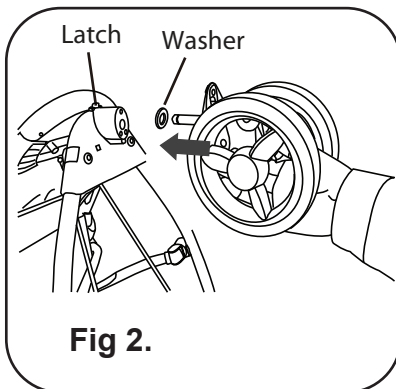


2. Assemble Front Wheels:

Insert the front wheel peg into the plastic base until you hear a click.

To disassemble:

Press down the button on the plastic base and pull the wheel set out.

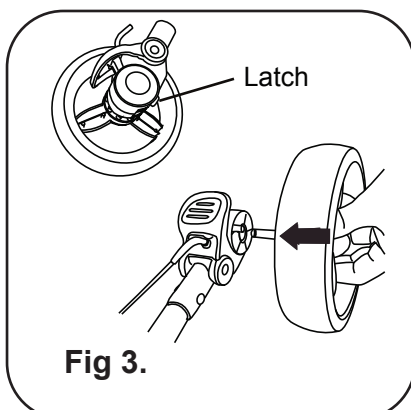


3. Assemble Rear Wheels:

Insert the rear wheel pegs into plastic houses until you hear a click.

To Disassemble:

Pull out the latch on the plastic housing and pull rear wheels out.


PUT ON ALL BRAKES WHEN YOU PARK THE VEHICLE.

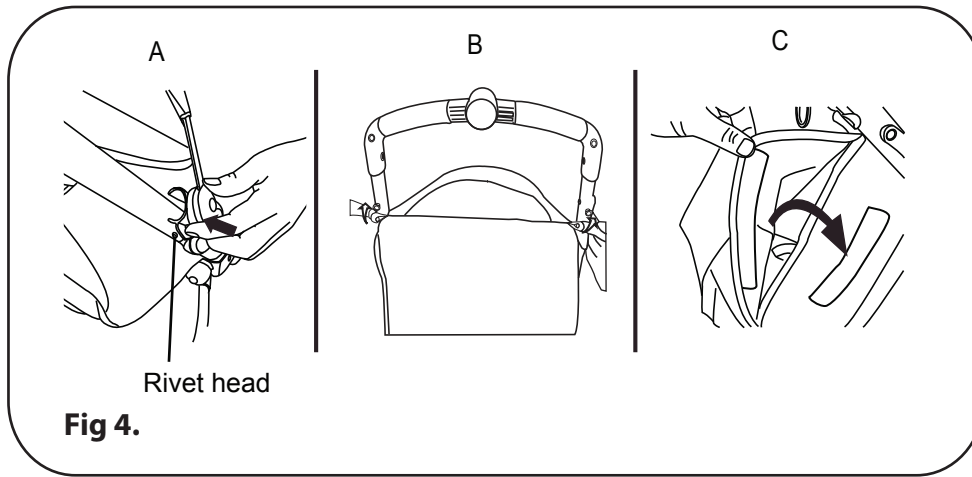

4. Assemble the Canopy:

Align the holes on the canopy fixture with the fixed rivets on the handle Press the fixture onto the handles (PART A)

Close the elastic fastening in the rear part of the hood on the pram frame and repeat the same procedure on the other side (PART B and C)

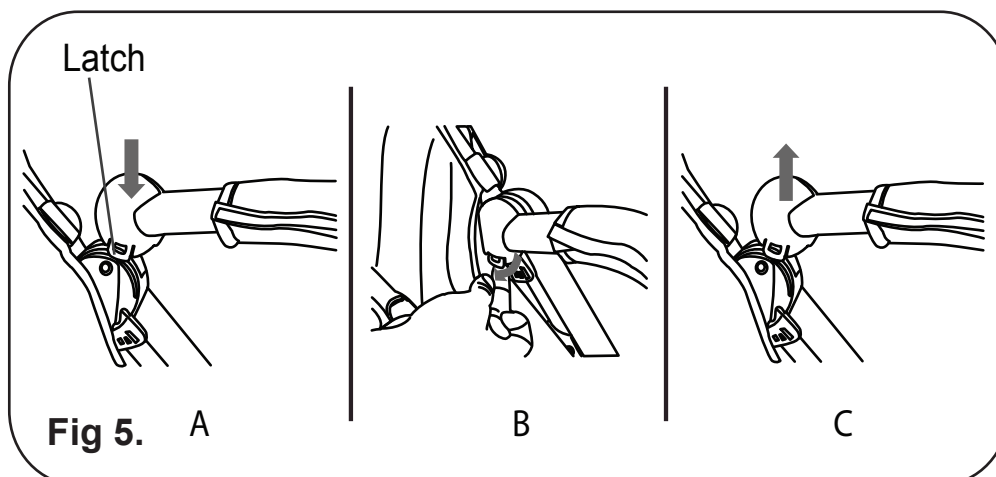


5. Attach the Bumper Bar:

Slide the ends of the bumper bar over the mouldings on the side of your stroller. As shown in part A. Keep sliding it down until the latch clicks into place on both sides. Push Firmly upwards to ensure that it is attached securely.

To Remove the Bumper Bar:

Ease the latch away from the frame and slide the bumper up.


How to Use

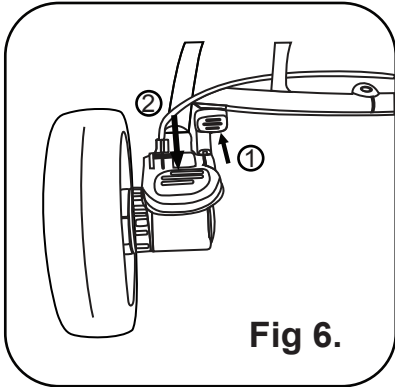

How to Use the Braking System:


At point 1 push down firmly on the red brake pedal to engage the brake.

At point 2 to release the brake simple press the grey pedal with your foot.

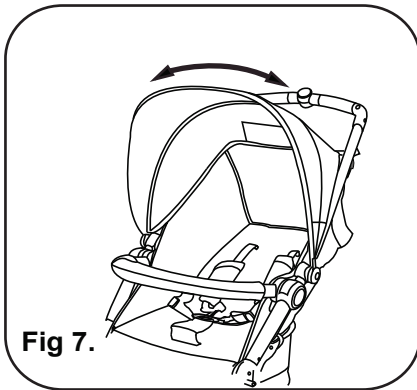


How to Adjust the Canopy:

Pull forward or press back ward the canopy wire to open or close the canopy.

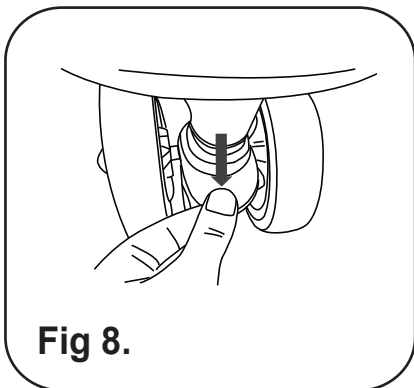

How to use the front swivel lock:

Press down on the swivel lock lever to swivel. Pull back the swivel lock lever and fix it into the base notch so the wheel can move steadily.

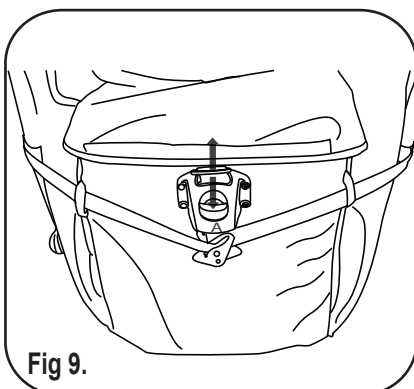


How to Adjust the Backrest:

To raise the back seat hold the adjusting buckle (point A) tightly grasp the plastic ring fixed to the end of the adjusting webbing and pull up.

To lower the seat press down the grey button and pull back the seat.


WARNING: Do not adjust the seat while the child is in the stroller.

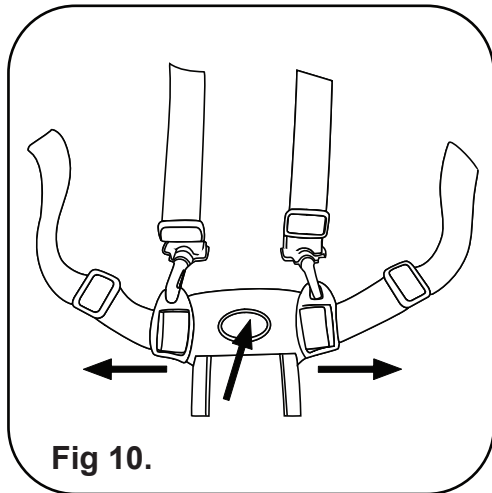

How to Use the Restraint System:

To unlock buckle press on on the centre button and pull harness out from each side.


to buckle, push each side of harness back into buckle until each side clicks in place.

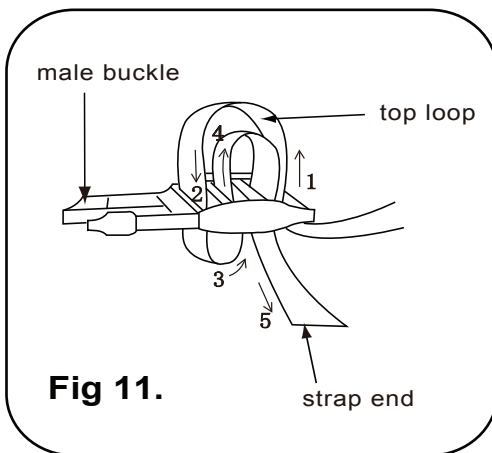

How to Adjust the Waist Strap Length:

To shorten, pull bottom loop (2) down then pull on strap end (1)

To Lengthen, pull out top loop (3) then pull out from the buckle.

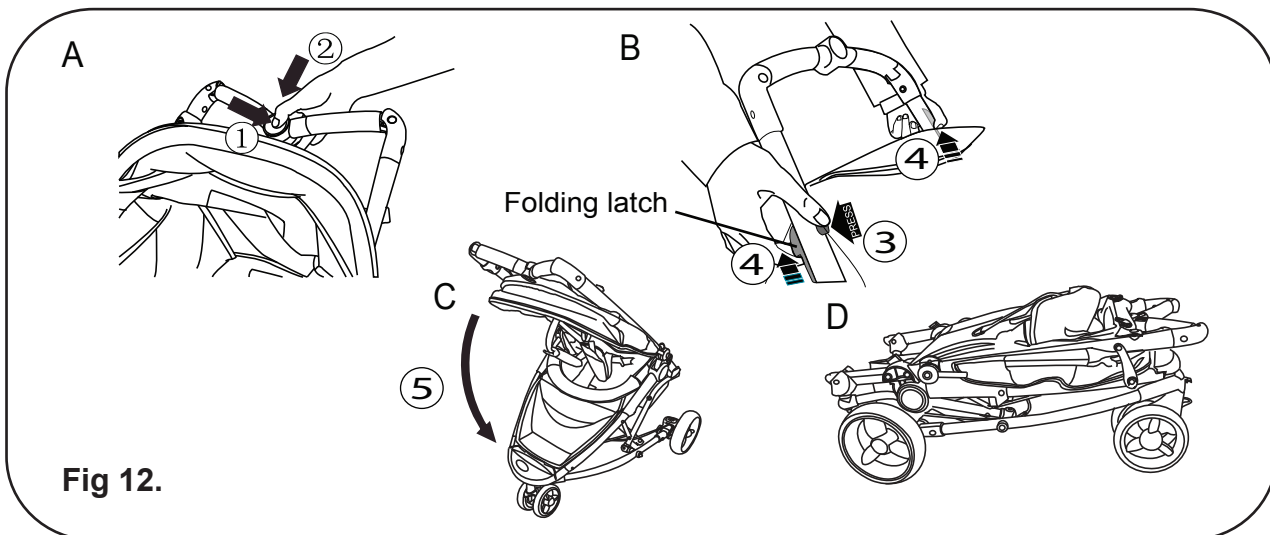

To Fold the stroller:

A. Press down on the button on the upper lock (1) and push down on the upper lock (2)


B. Press the small grey button (3) on the top of the right handle, slide up the folding latches (4) on the handles and push forward the handles at the same time.

C. Press them down to fold the frame (5)

D. Folded Frame

Attaching the Tether Strap.

Please ensure you attach the tether strap to the handle of the stroller by using a loop to better control the stroller and so it does not get out of reach.



WARNING

USE THIS STRAP TO STOP THE
STROLLER ROLLING AWAY



Contact Us

Head Office:

Love N Care Pty Ltd.
297-299 Canterbury Rd, Revesby
NSW 2212 Australia
Contact No: 02 9774 4655
Fax: 02 9774 4633
Email: info@lovencare.com.au
Website: www.lovencare.com.au

Western Australia

5 Modal Crescent
Canning Vale WA 6155 Australia
Contact No: 08 9455 4972
Fax: 08 9455 4728

Brisbane

7-9 Eileen Street
Underwood QLD 4119 Australia
Contact No: 07 3290 4217
Fax: 07 3209 5019

Ireland

DMG House
Deansgrange Industrial Estate
Deansgrange Co. Dublin
Phone: +3531 2190254
Fax: +3531 2802734
Website: www.lovencare.ie